


Key Features

- Custom built to match the exact width of your flat panel display
- Ultra slim profile – only two inches deep
- High resolution drivers for precise vocal articulation
- Can be used with an optional Innovox sub-bass in 2.1 applications

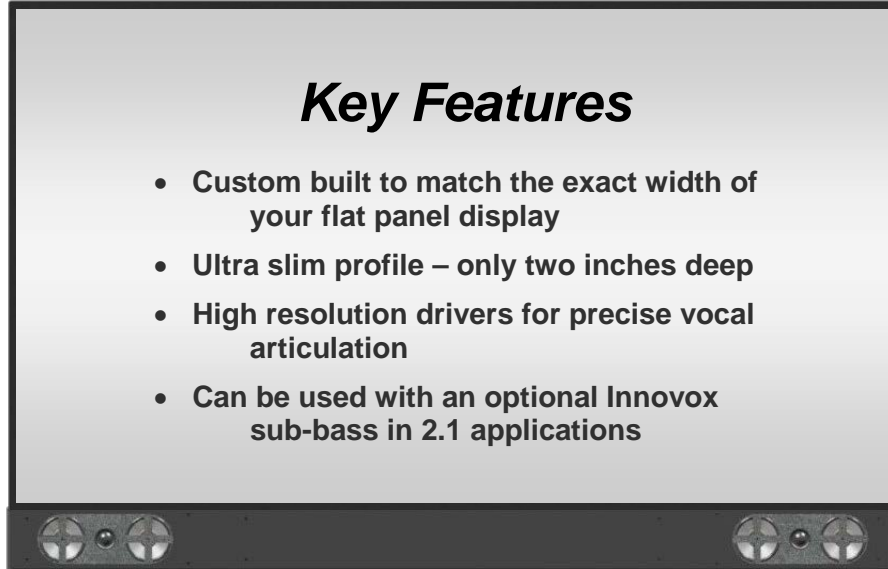

(shown without grille)

DESCRIPTION

The *Flex Select* Model **FS-H2** is an ultra slim two-channel horizontal loudspeaker designed to mate with flat panel video displays. It has been developed for applications where the budget allows the use of separate amplifiers external to video displays. Carefully selected drivers are employed with sophisticated filter networks to take full advantage of the reserve power available with separate amplifiers to optimize performance and SPL in a slim profile. Nominal coverage angle is 100° H x 120° V. Configuration per channel includes two 3.5" long-excursion LF drivers and one .75" textile dome HF driver.

NOMINAL DATA

Frequency Response	120 – 20,000 Hz, ± 3 dB
Sensitivity	90 dB @ 2.83 volts / 1M
Impedance	8 Ω
Power Handling	90 W long term (AES-2) (per channel)
Maximum Output	103 dB long term; 109 dB peak
Nominal Coverage Angles	100° H x 120° V
Dimensions	height: 4.13 " width: (custom: 34.0 – 96.0") depth: 2.06 "
Net Weight	12-15 lbs (depending on length)
Shipping Weight	15-17 lbs (depending on length)

DESCRIPTIVE DATA

System Configuration	2-channel 2-way full-range for music / speech
Components & Loading (per channel)	(2) 3.5 " long-throw woofers; (1) 0.75" tweeter
Recommended High-Pass Filter	On-board 1 st order @ 120 Hz; no outboard HP needed
Enclosure Type	Low profile sealed enclosure
Enclosure Material	Extruded ABS plastic with steel baffle insert
Finish	Black is standard; (custom colors available)
Connectors	Phoenix
Grille	Integral fabric wrap