



innovoxaudio.com

Sub-Bass Series –

SB-115i

DESCRIPTION

The **SB-115i** is a compact permanent installation sub-bass loudspeaker. It employs a 15 inch long-excursion driver in an optimally tuned vented enclosure. It is an ideal choice for applications requiring precise transient response and low bass extension in a compact package.


The **SB-115i**'s small size and high output integrate well with other compact loudspeaker array elements to extend bass response while having minimal visual impact. It can be suspended from internal fly points or positioned on the floor.

KEY FEATURES:

- compact size
- bass extension to 32Hz
- excellent transient response

APPLICATIONS:

- churches
- performing arts centers
- large home theaters
- night clubs

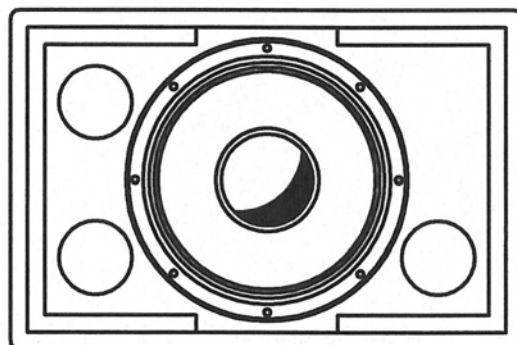

NOMINAL DATA

Frequency Response	32 – 350 Hz ± 3 dB
Sensitivity	93 dB @ 2.83 volts / 1M (in operating band)
Impedance	8 Ω
Power Handling	1200 W long term (AES-2)
Maximum Output	122 dB long term; 128 dB peak
Nominal Coverage Angles	omni-directional
Dimensions	height: 17.75 " / 451 mm width: 25.50 " / 648 mm depth: 17.75 " / 451 mm
Net Weight	81 lbs / 36.8 kg
Shipping Weight	87 lbs / 39.5 kg

DESCRIPTIVE DATA

System Configuration	Dedicated sub-bass
Components & Loading	(1) 15 " long-excursion cone driver
Recommended High-Pass Filter	4 th order Butterworth @ 27 Hz
Enclosure Type	Optimally tuned, vented
Enclosure Material	Hardwood multi-ply plywood
Finish	Black or White (custom finishes available)
Connectors	Dual binding head screws
Suspension Hardware	(8) 3/8"-16 threaded mounting points located on enclosure top, sides, back
Grille	Fabric wrapped perforated steel grille

West Coast Office

1155-C Arnold Drive, #231
Martinez CA 94553
ph: **925 372-8156**
email: orders@innovoxaudio.com

Central Office

296 North Pascal Street
Saint Paul MN 55104
ph: **612 379-0100**
email: sales@innovoxaudio.com

innovoxaudio.com